

INSTRUCTION MANUAL

DEWALT®

DE0881-XE
TRIPOD



Definitions: Safety Guidelines

The definitions below describe the level of severity for each signal word. Please read the manual and pay attention to these symbols.

⚠DANGER: Indicates an imminently hazardous situation which, if not avoided, **will** result in **death or serious injury**.

⚠WARNING: Indicates a potentially hazardous situation which, if not avoided, **could** result in **death or serious injury**.

⚠CAUTION: Indicates a potentially hazardous situation which, if not avoided, **may** result in **minor or moderate injury**.

NOTICE: Indicates a practice **not related to personal injury** which, if not avoided, **may** result in **property damage**.

IF YOU HAVE ANY QUESTIONS OR COMMENTS ABOUT THIS OR ANY DEWALT TOOL, CALL US AT: **1800 444 224** (Aust) or **0800 339 258** (NZ).

Technical Data

DE0881		
Threaded pin		M6 x 20
Max height	cm	172
Weight	kg	1,5

SAFETY INSTRUCTIONS

Always observe the safety regulations applicable in your country to reduce the risk of fire, electric shock and personal injury. Read the following safety instructions before attempting to operate this product. Keep these instructions in a safe place.



WARNING: To reduce the risk of injury, read the instruction manual.



WARNING! Read all safety warnings and all instructions Failure to follow the warnings and instructions may result in electric shock, fire and/or serious injury.

Read all of this manual carefully before operating the attachment. Also refer to the manual of any power tool that will be used with this attachment.

SAVE THESE INSTRUCTIONS

GENERAL WARNINGS

1. **Keep work area clean.**

Cluttered areas and benches can cause accidents.

2. **Keep children away.**


Do not let children come into contact with the tool or extension cord. Supervision is required for inexperienced users.

3. **Use appropriate tool.**

The intended use is described in this instruction manual. Do not force small tools or attachments to do the job of a heavy-duty tool. The tool will do the job better and safer at the rate for which it was intended.

⚠WARNING: The use of any accessory or attachment or performance of any operation with this tool, other than those recommended in this instruction manual may present a risk of personal injury.

FIG. 1

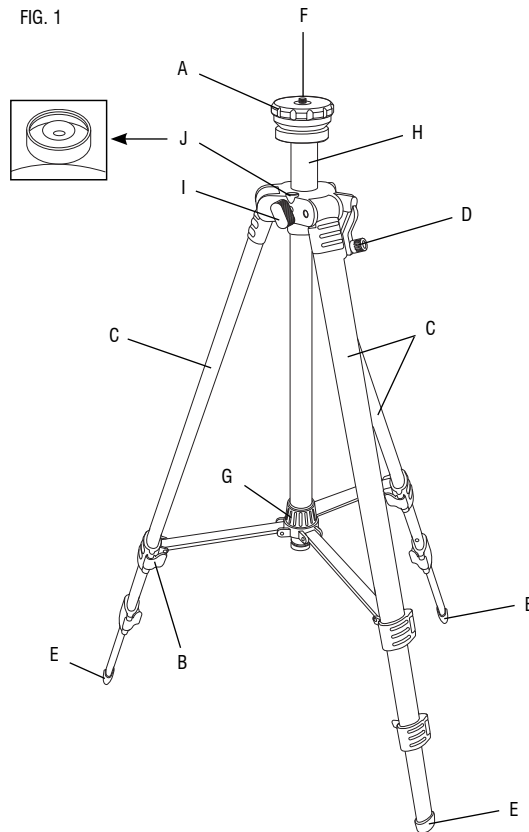

DESCRIPTION (FIG. 1)

⚠WARNING: Never modify the tripod or any part of it. Damage or personal injury could result.

- | | |
|--------------------------|-----------------------|
| A. Rotary head mount | F. Mounting thread |
| B. Quick-adjust latch | G. Locking collar |
| C. Legs | H. Elevator column |
| D. Elevator crank handle | I. Elevator lock knob |
| E. Foot | J. Bubble level |

INTENDED USE

Your tripod has been designed to extend the capabilities of your laser. The tripod helps to position the laser on rough, out-of-level surfaces. The tripod can be used both indoors and outdoors.

DO NOT let children come into contact with the attachment or laser. Supervision is required when inexperienced operators use this attachment.

OPERATION

Instructions for Use

⚠WARNING: Always observe the safety instructions and applicable regulations.

⚠WARNING: Refer to the laser manual to be used with this attachment.

Bubble Level

Use the bubble level (J), located under the rotary head mount (A), to ensure the tripod is level.

Tripod Setup

1. Spread the legs (C) apart to install the tripod in upright position.
2. Tighten the locking collar (G).
3. Adjust the legs (C) if required so that each of the feet (E) is firmly touching the ground.
4. Mount the laser on the tripod.

Adjusting the Leg Height

1. Release the quick-adjust latch (B) of the first leg (C) to set the desired height. Tighten the latch.
2. Repeat process for the other legs.

Mounting the Laser to the Tripod

The tripod has been equipped with a threaded pin for mounting of the DW088-XE and DW089-XE lasers.

1. Install the tripod on a relatively smooth and level surface, using the bubble level (J) as a guide.
2. Mount the laser to the tripod by turning the mounting thread (F) into the receptacle in the base of the laser.

⚠ WARNING: Before mounting a laser to the tripod, check that the legs are firmly set and that the tripod is wobble free.

Elevating the Head Mount

The head mount (A) can be elevated to a maximum height of 1.7 m. The laser is operated using the elevator crank handle (D). Move the head mount to the desired height and tighten the elevating lock knob (I).

Storage

In order to conveniently store the attachment, a carrying bag is included.

MAINTENANCE

Accessories

⚠ WARNING: Since accessories, other than those offered by DEWALT, have not been tested with this product, use of such accessories with this tool could be hazardous. To reduce the risk of injury, only DEWALT recommended accessories should be used with this product.

Recommended accessories for use with your tool are available at extra cost from your local service center. If you need any assistance in locating any accessory, please contact Stanley Black & Decker, 82 Taryn Drive, Epping, VIC 3076 Australia or call 1800 444 224 or (NZ) 0800 339 258.





Stanley Black & Decker
82 Taryn Drive, Epping, VIC 3076 Australia • 1800 444 224 (Aust) or 0800 339 258 (NZ)
www.dewalt.com.au • www.dewalt.com.nz

(JAN12) Part No. N157163 DE0881-XE Copyright © 2012 DeWALT

The following are trademarks for one or more DeWALT power tools: the yellow and black color scheme; the “D” shaped air intake grill; the array of pyramids on the handgrip; the kit box configuration; and the array of lozenge-shaped humps on the surface of the tool.