



## MB195UC, -BK, -BL, -GR, -NG, -OR, -PP, -YE 3 Drawer Deluxe Utility Cart

### ASSEMBLY INSTRUCTIONS


Due to the weight of this cart we recommend that **TWO PEOPLE** work together on the assembly. This cart weighs approximately 200 lbs, please use caution during assembly.

**Step 1:** Locate the key tied to the bottom shelf. Using the key, open the sliding top and remove the caster box from the bottom drawer. Once removed, make sure all drawers are completely closed and the inside lever is in the locked position. Close the sliding top and lock.


**Step 2:** Lay out a work surface using the protective foam provided. Once this surface is secure, gently turn the cart onto its back.

**Step 3:** (Before assembling the legs, remove the cable tie holding the bumper in place.) Insert the front leg (Part #7), labeled FL or FR. Then place the front bumper (Part #13) over the leg, aligning the center bolt holes. With holes aligned, insert Torx bolt (Part #1a) and finger tighten.


**Step 4:** Install back leg (Part #7) labeled BL or BR and bumper (Part #13), following the same procedure as above.

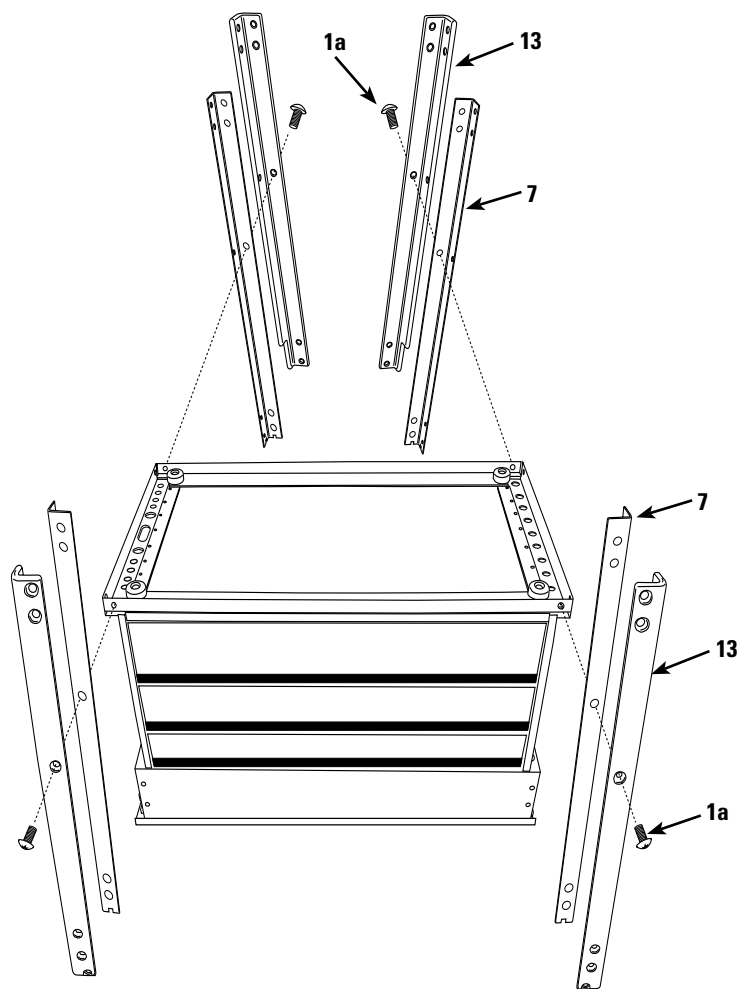

**Step 5:** Repeat steps 3 & 4 to mount the legs on the opposite side.

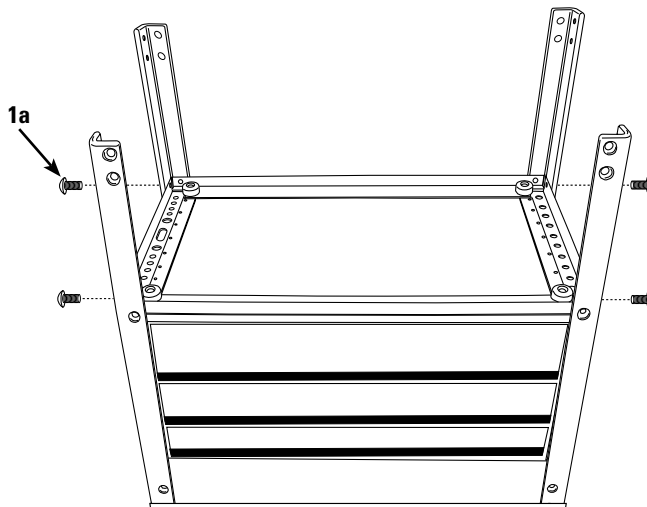

**Step 6:** Mounting casters: Put the four casters in place. The two locking casters (Part #10) should be on one side of the cart, and the two non locking casters (Part #9) should be on the other (**Left or right side, NOT front or back**). Using the 16 bolts (Part #8), washers, and lock washers (located in separate caster bag), completely tighten the casters to the bottom tray, using a 14mm socket or 14mm combination wrench for the bolt head. (Note: Bolt head, washer and lock washer should be on the inside of the bottom shelf.)

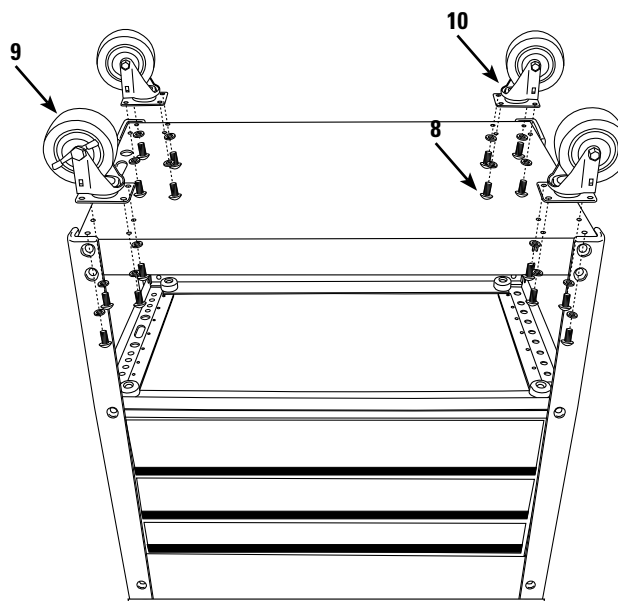




## MB195UC, -BK, -BL, -GR, -NG, -OR, -PP, -YE 3 Drawer Deluxe Utility Cart

### ASSEMBLY INSTRUCTIONS


**Step 7:** Insert bottom shelf (Part # 18) between the four legs, flat side facing up towards the ceiling. Make sure the side with 3 holes is on the same side as corresponding 3 holes in the middle section and the black tubes at the top. Insert sixteen Torx bolts (Part #1a) and finger tighten.

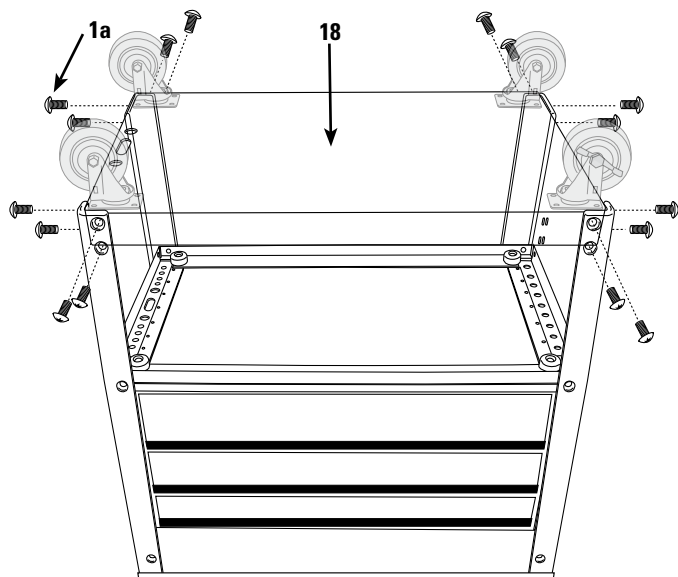


**Step 8:** Carefully lift cart onto its casters.

**Step 9:** Open sliding top using the key provided.

**Step 10:** Assemble the brackets (Part #5) to the comfort grip push handles (Part #6); then mount push handles and brackets to both sides of the cart using the eight Torx bolts (Part #1b) provided. Finger tighten at this time.

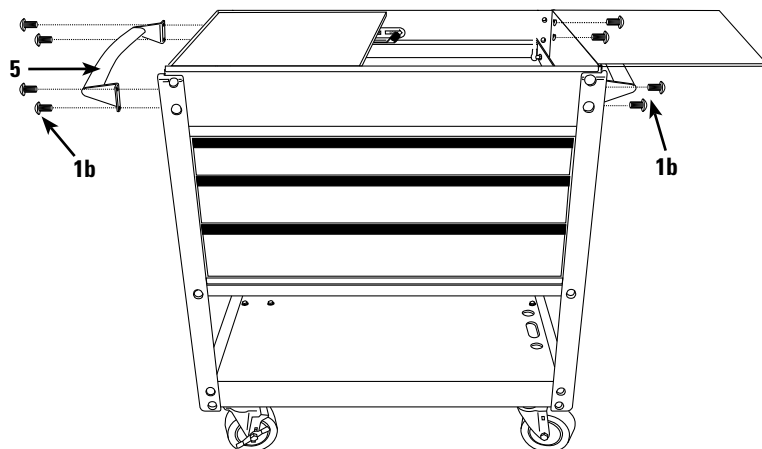

**Step 11:** Insert the remaining 8 Torx bolts (Part #1a).

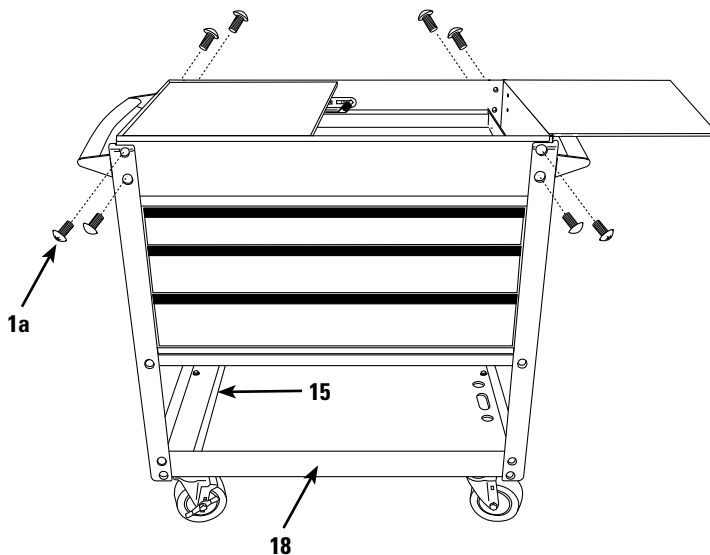


**Step 12:** Completely tighten all fasteners!!

**Step 13:** Insert spray can divider (Part #15) into provided channel on the bottom shelf (Part #18).





## MB195UC, -BK, -BL, -GR, -NG, -OR, -PP, -YE 3 Drawer Deluxe Utility Cart

### HARDWARE SPECIFICATIONS



T45 Torx Bolt (M8 x 18) 32 pcs. (1a)

T45 Torx Bolt (M8 x 20) 8 pcs. (1b)



Hex Bolt, Washer, and Lock Washer  
(M8 x 20) 16 pcs. (8)

#### Please Note:

2 extra (M8 x 18) Torx bolts and 2 extra hex bolts (M8 x 20) have been included in case of loss or damage.

### TROUBLESHOOTING

Troubleshooting Points during MB195UC Assembly.

**Problem:** Drawers appear not to fit, do not slide in accurately and bump the cart sides.

**Solution:** The roller bearing slides must be fully engaged into the mounting slots on all drawers. They potentially could fall out of position while turning the cart on its lid, back, or onto its casters.

Remove the drawer that is out of position. The drawer is removed by the two clips on the roller bearing slides.

Simply push the roller bearing slide back down into position.

Insert the drawer back onto the roller bearing slides.

**Problem:** Back Lock/Unlock Switch does not engage the drawer.

**Solution:** The inside Lock/Unlock slide potentially could fall out of its groove while turning the cart on its lid, back, or onto its casters.

Unscrew the four screws that are holding the Lock/Unlock slide in place.

Once the screws are removed simply place the latch back onto the slide and tighten the four screws back down.

## ! WARNING

### SERVICE CART WEIGHT CAPACITY

Maximum Total Net Load .....	600 LBS
Top and Bottom Shelf .....	150 LBS each
Top Two Drawers .....	100 LBS each
Bottom Drawer .....	200 LBS
Sliding Work Surface (closed) .....	200 LBS
Sliding Work Surface (fully extended) ....	50 LBS

**PLEASE NOTE:** Loading cart beyond rated capacity may cause structural damage to the cart as well as personal and /or property damage. Please educate your customers to the dangers of overloading.




## MB195UC, -BK, -BL, -GR, -NG, -OR, -PP, -YE 3 Drawer Deluxe Utility Cart

### PARTS LIST


Item No.	Part No.	No. Req'd	Description
1a	RS195UCBK	1	Set of 32 M80x18 Torx Bolts
1b		1	8 M80x20 Torx Bolts (4 included w/ each #5)
5	RS195UCHB	2	Push Handle Brackets/Pair with Hardware
6	RS190UCHDL	2	Push Handle
7	RS195UCLG-R	4	Red Leg/each
	RS195UCLG-BK		Black Leg/each
	RS195UCLG-BL		Blue Leg/each
	RS195UCLG-GR		Green Leg/each
	RS195UCLG-NG		Neon Green Leg/each
	RS195UCLG-OR		Orange Leg/each
	RS195UCLG-PP		Purple Leg/each
	RS195UCLG-Y		Yellow Leg/each
8	RC195UCCB	1	Set Of 16 M8x20 Bolts, Washers, and Lock Washers (for casters)
9	RS195CS	2	Swivel Caster /each
10	RS195LCS	2	Swivel Caster with Lock /each
11	RSBKT	2	Bracket for Paper Storage Area
12	RS190UCHBK	3	Black Drawer Handle/each
13	RS190UCBP	1	Set of 4 Bumpers
14	RSLKA	1	Lock with Keys
14a	RS190UCLRT	1	Rod, Bracket, and Pin
15	RSSCD-R	1	Red Spray Can Divider
	RSSCD-BK		Black Spray Can Divider
	RSSCD-BL		Blue Spray Can Divider
	RSSCD-GR		Green Spray Can Divider
	RSSCD-NG		Neon Green Spray Can Divider
	RSSCD-OR		Orange Spray Can Divider
	RSSCD-PP		Purple Spray Can Divider
	RSSCD-Y		Yellow Spray Can Divider
16	MBD195UC1	2	Red 3" Drawer
	MBD195UC1-BK		Black 3" Drawer
	MBD195UC1-BL		Blue 3" Drawer
	MBD195UC1-GR		Green 3" Drawer
	MBD195UC1-NG		Neon Green 3" Drawer
	MBD195UC1-OR		Orange 3" Drawer
	MBD195UC1-PP		Purple 3" Drawer
	MBD195UC1-YE		Yellow 3" Drawer
17	MBD195UC2	1	Red 6" Drawer
	MBD195UC2-BK		Black 6" Drawer
	MBD195UC2-BL		Blue 6" Drawer
	MBD195UC2-GR		Green 6" Drawer
	MBD195UC2-NG		Neon Green 6" Drawer
	MBD195UC2-OR		Orange 6" Drawer
	MBD195UC2-PP		Purple 6" Drawer
	MBD195UC2-YE		Yellow 6" Drawer
18	MBS195UC	1	Red Bottom Shelf
	MBS195UC-BK		Black Bottom Shelf
	MBS195UC-BL		Blue Bottom Shelf
	MBS195UC-GR		Green Bottom Shelf
	MBS195UC-NG		Neon Green Bottom Shelf
	MBS195UC-OR		Orange Bottom Shelf
	MBS195UC-PP		Purple Bottom Shelf
	MBS195UC-YE		Yellow Bottom Shelf
19	RS190UCPBT	3	Prybar Tube/each
20	RS190UCLMR	1	Red Locking Mechanism
	RS190UCLMBK		Black Locking Mechanism
	RS190UCLMBL		Blue Locking Mechanism
	RS190UCLMGR		Green Locking Mechanism
	RS190UCLMNG		Neon Green Locking Mechanism
	RS190UCLMOR		Orange Locking Mechanism
	RS190UCLMPP		Purple Locking Mechanism
	RS190UCLMYE		Yellow Locking Mechanism
21	MB195UCSTP	1	Red Sliding Top with Paper Storage
	MB195UCSTPBK		Black Sliding Top with Paper Storage
	MB195UCSTPBL		Blue Sliding Top with Paper Storage
	MB195UCSTPGR		Green Sliding Top with Paper Storage
	MB195UCSTPNG		Neon Green Sliding Top with Paper Storage
	MB195UCSTPOR		Orange Top with Paper Storage
	MB195UCSTPPP		Purple Sliding Top with Paper Storage
	MB195UCSTPYE		Yellow Sliding Top with Paper Storage
22	MB195UCSTLK	1	Red Sliding Top with Lock
	MB195UCSTLKBK		Black Sliding Top with Lock
	MB195UCSTLKBK		Blue Sliding Top with Lock
	MB195UCSTLKGR		Green Sliding Top with Lock
	MB195UCSTLKNG		Neon Green Sliding Top with Lock
	MB195UCSTLKOR		Orange Top with Lock
	MB195UCSTLKPP		Purple Sliding Top with Lock
	MB195UCSTLKYE		Yellow Sliding Top with Lock

#### Also available:

RSSCPK	Service Cart Polishing Kit
RS195SL	Roller Bearing Slides with 2 #6 Screws for Drawer/pair
RS195SLT	Roller Bearing Slides with 15 Steel Rivets for Sliding Top/pair
RSMB190UCMLP	MAC Logo Plate
RS195UC6LK	6 Piece Liner Kit

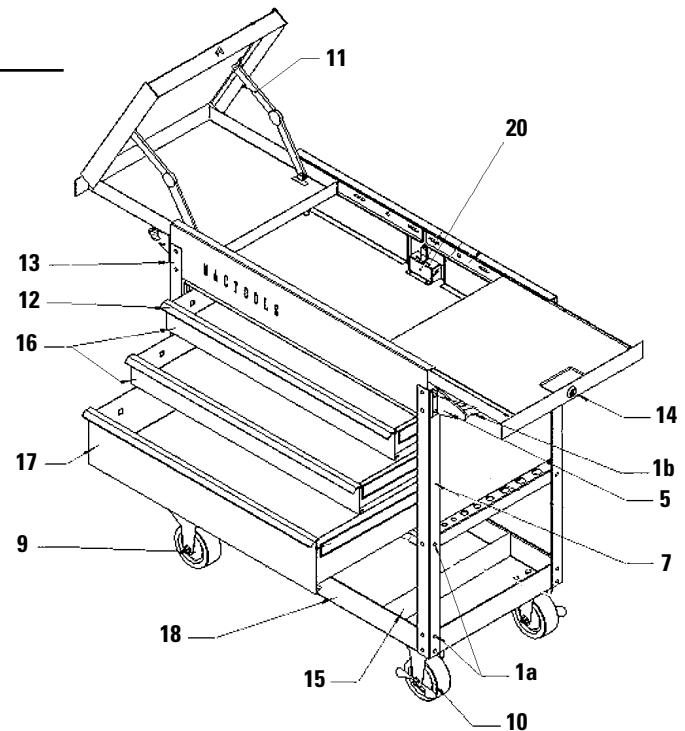

### PART DRAWINGS

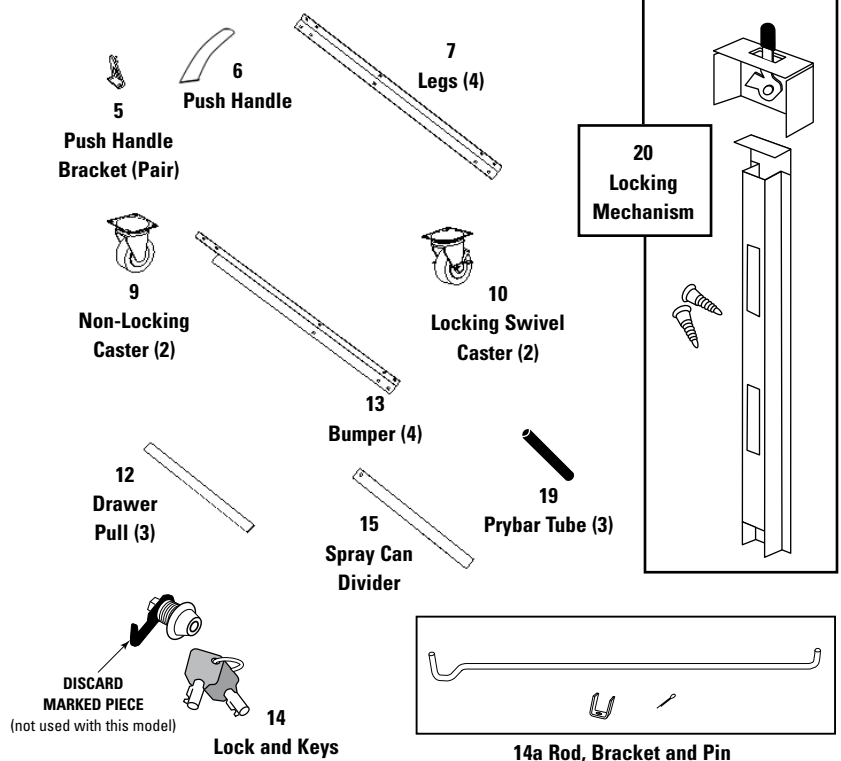

L-Shaped hex key included for adjusting the tension on the RSBKT bracket (item no.11)

#### TOOLS NEEDED FOR ASSEMBLY:

T45 Torx Driver or Torx Key  
14mm Combination Wrench,  
Socket, or Universal Socket  
4" Extension  
Ratchet